





Proximity Sensors

E2V-X□



30 Years of Innovation

Long-distance Detection of Aluminum or Iron
A Proximity Sensor with a NEW Detection Principle

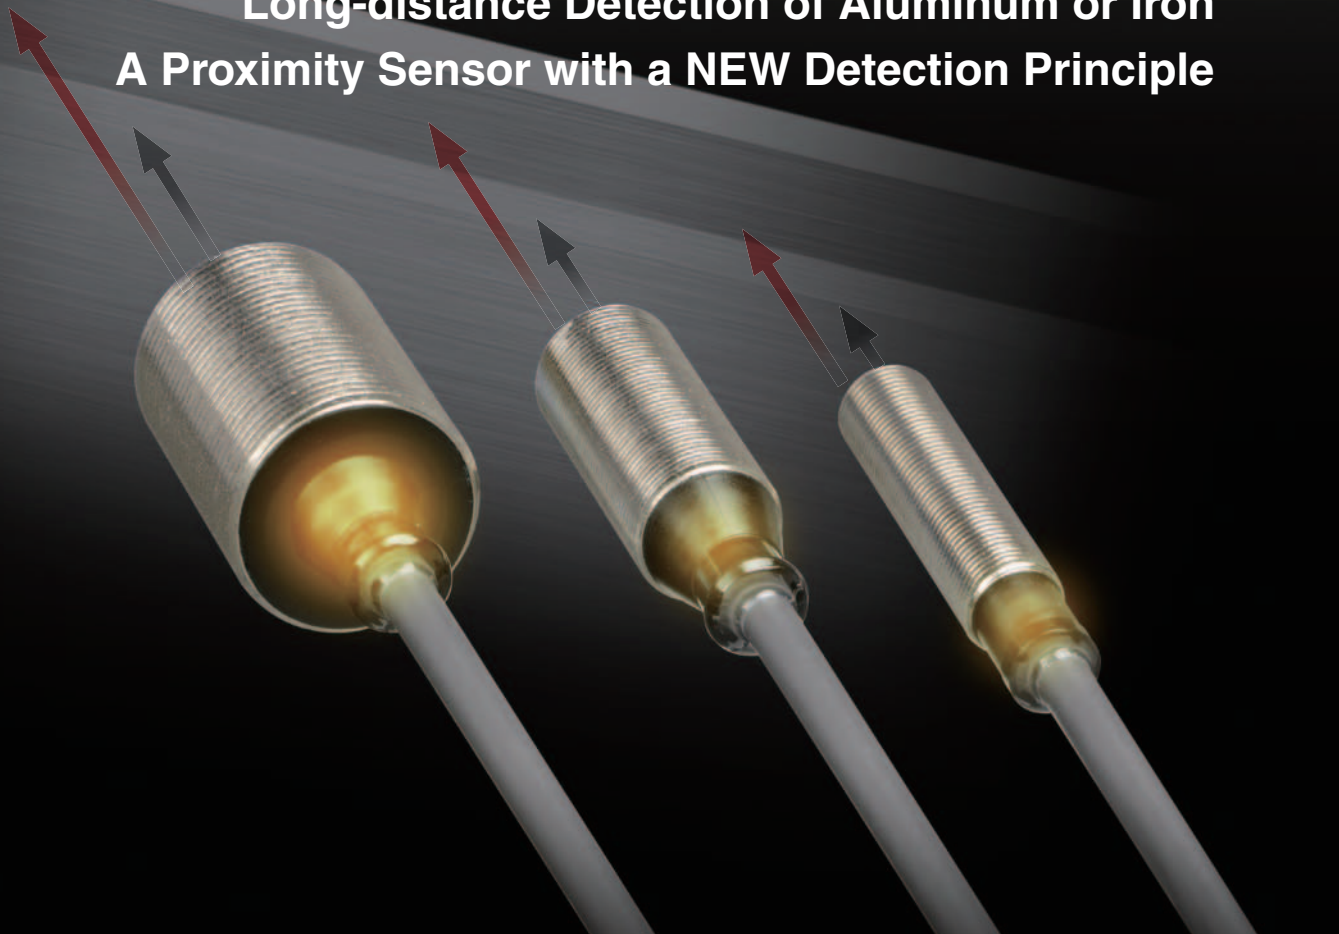

Smartclick
Pre-wired Connector Models
Standard Models



Aluminum Detection Distance: 2 Times Previous Models

*In-house comparison of M18 Shielded Long-distance Models

Immunity against aluminum chips has enabled achieving long-distance detection of aluminum workpieces. The same detection distance has also been achieved for iron, allowing the E2V-X□ to be separated from workpieces made of either metal farther than any other Proximity Sensor.

Aluminum Excellent Performance, with Aluminum Chip Immunity!


Iron Also Detects Iron at Long Distances!

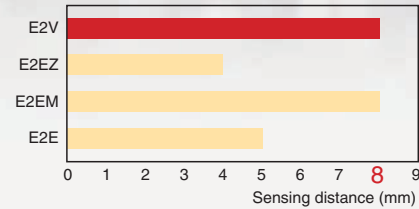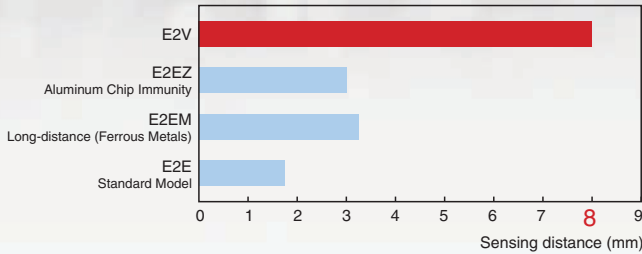

Detection Made Visible

An operation indicator that is visible from any direction is provided as a standard feature.


This indicator flashes under unstable conditions for easy installation condition verification at a glance.

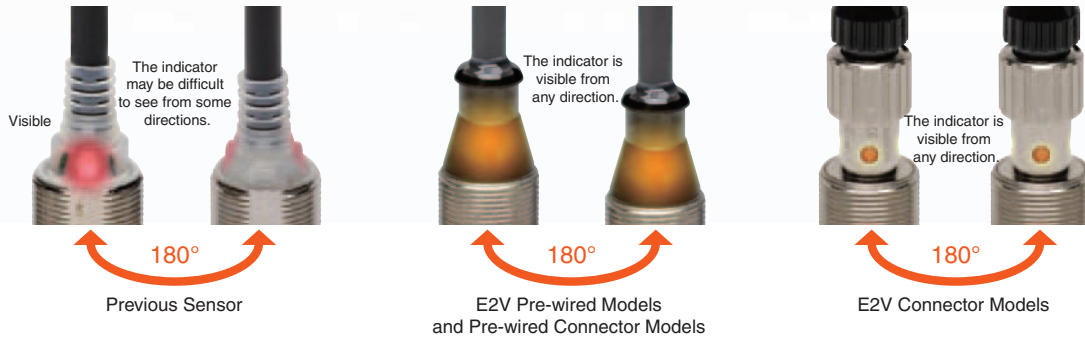

Embeddable in Metal.

The first Long-distance Sensor that is shielded. Possible to be completely embedded in metal.


Embedded Mounting in Metal

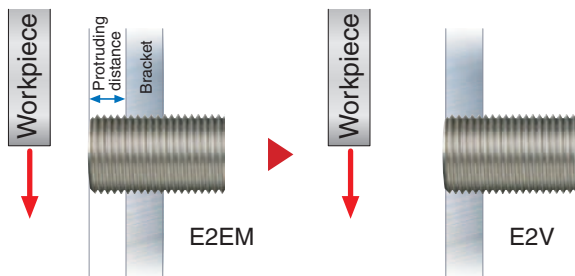


Applications



Long-distance Detection of Crankshafts



Cylinder Block Seating Detection



Detect Passing Parts

Ratings and Specifications


Size	M12		M18		M30	
Item \ Model	E2V-X2□□	E2V-X4□□	E2V-X5□□	E2V-X8□□	E2V-X10□□	E2V-X15□□
Sensing distance	2mm±10%	4mm±10%	5mm±10%	8mm±10%	10mm±10%	15mm±10%
Set distance	0 to 1.6 mm	0 to 3.2 mm	0 to 4.0 mm	0 to 6.4 mm	0 to 8.0 mm	0 to 12.0 mm
Differential travel	10% max. of sensing distance					
Detectable object	Ferrous metals and non-ferrous metals (The sensing distance depends on the material of the sensing object. Refer to <i>Engineering Data (Typical)</i> .)					
Standard sensing object	Aluminum: 12 × 12 × 3 mm	Aluminum: 12 × 12 × 3 mm	Aluminum: 18 × 18 × 3 mm	Aluminum: 24 × 24 × 3 mm	Aluminum: 30 × 30 × 3 mm	Aluminum: 45 × 45 × 3 mm
Response frequency*	150Hz	40Hz	70Hz	40Hz	70Hz	30Hz
Power supply voltage (operating voltage range)	12 to 24 VDC (10 to 30 VDC), ripple (p-p): 10% max.					
Current consumption	450 mW max. (Current consumption: 15 mA max. at power supply voltage of 30 V)					
Control output	Load current	Open-collector output, 100 mA max.				
	Residual voltage	2 V max. (Load current: 100 mA, Cable length: 2 m)				
Indicators	NO Models: Operation indicator (yellow) (flashing), Setting indicator (yellow) (lit); NC Models: Operation indicator (yellow) (lit)					
Operation mode	B1/C1 Models: NO B2/C2 Models: NC (Refer to the timing charts under <i>I/O Circuit Diagrams</i> for details.)					
Protection circuits	Power supply reverse polarity protection, reversed output polarity protection, load short-circuit protection, surge suppressor					
Ambient temperature	Operating/Storage: -25 to 70°C (with no icing or condensation)					
Ambient humidity	Operating/Storage: 35% to 95% (with no condensation)					
Temperature influence	Based on the sensing distance at 23°C in the temperature range of -25 to 70°C					
	±10% max.	±15% max.	±10% max.	±15% max.	±10% max.	±15% max.
Voltage influence	±1.5% max. of sensing distance at rated voltage in the rated voltage ±15% range					
Insulation resistance	50 MΩ min. (at 500 VDC) between current-carrying parts and case					
Dielectric strength	1,000 VAC, 50/60 Hz for 1 minute between current-carrying parts and case					
Vibration resistance	Destruction: 10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions					
Shock resistance	Destruction: 1,000 m/s ² 10 times each in X, Y, and Z directions					
Degree of protection	IEC IP67 (Pre-wired Models and Pre-wired Connector Models are oil-resistant to the OMRON in-house standard.)					
Connection method	Pre-wired Models (Standard cable length: 2 m), Connector Models, Pre-wired Connector Models (Standard cable length: 300 mm)					
Weight (packed state)	Cable	Approx. 120 g		Approx. 150 g		Approx. 200 g
	Connector	Approx. 30 g		Approx. 45 g		Approx. 120 g
	Pre-wired Connector Models	Approx. 50 g		Approx. 70 g		Approx. 140 g
Materials	Case	Nickel-plated brass				
	Sensing surface	Heat-resistant ABS				
	Clamping nuts	Nickel-plated brass				
	Toothed washer	Zinc-plated iron				
Accessories	Instruction manual					

* The response frequency is an average value.
Measurement conditions are as follows: Standard sensing object, a distance between target objects of twice the size of the standard sensing object, and a set distance of half the sensing distance.


Engineering Data (Typical)

Influence of Sensing Object Size and Material


E2V-X2

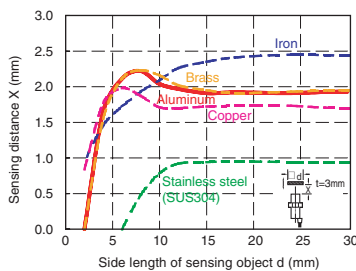


E2V-X4

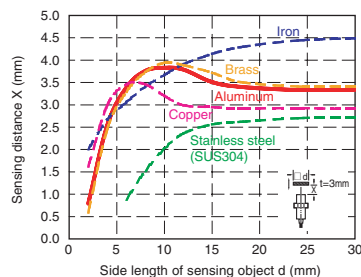


E2V-X5

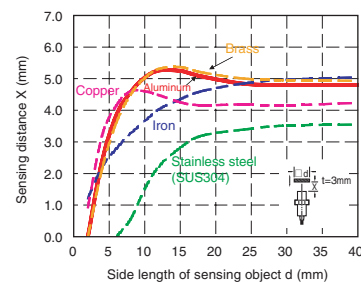


E2V-X2




E2V-X8

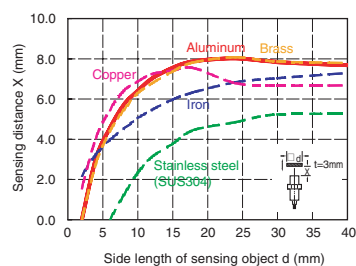


E2V-X10

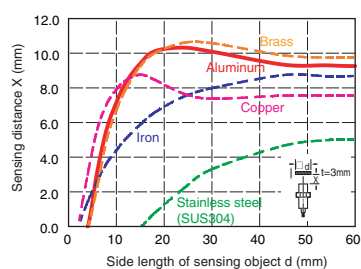

E2V-X15

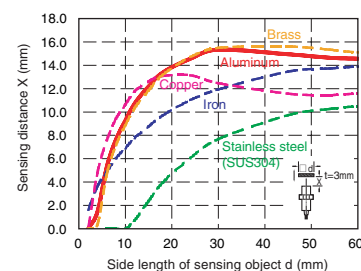


E2V-X8



I/O Circuit Diagrams and Timing Charts

Output Circuit Diagrams and Connections

E2V-X□□□ (-M1/M1TJ)

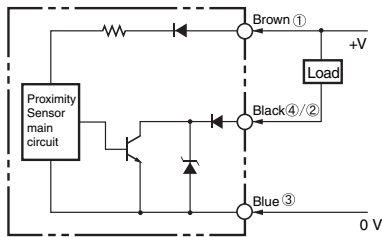


Note: Connector Models
NO Models: ①④③
NC Models: ①②③




Compatible Connector Cables: XS5F Series
XS2F Series

Operation mode

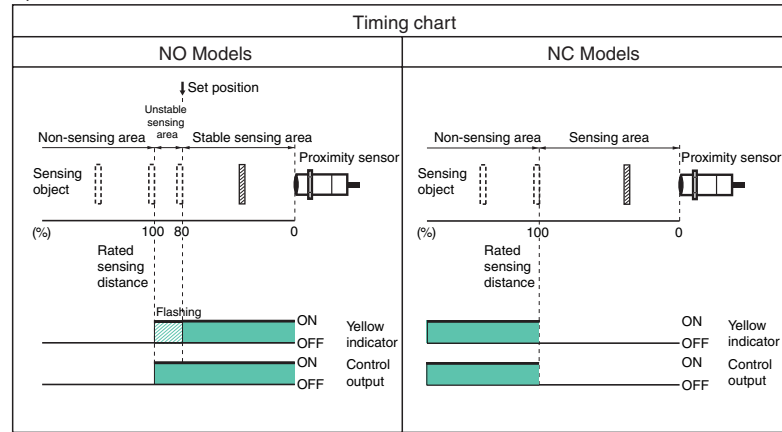

E2V-X□□□ (-M1/M1TJ)

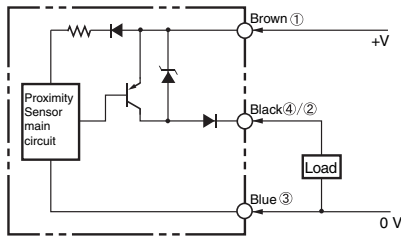

Note: Connector Models
NO Models: ①④③
NC Models: ①②③



Compatible Connector Cables: XS5F Series
XS2F Series

Safety Precautions



WARNING

This product is not designed or rated for ensuring safety of persons. Do not use it for such purposes.




Never use the product with an AC power supply. Otherwise, explosion may result.




Object Size and Material


E2V-X4

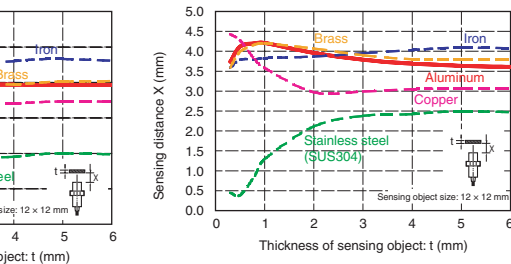


E2V-X5

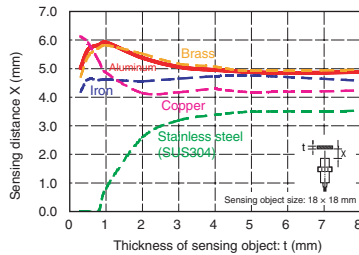

E2V-X10

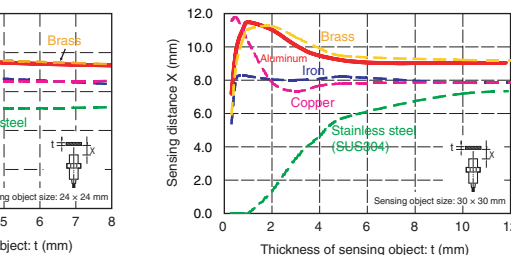


E2V-X15

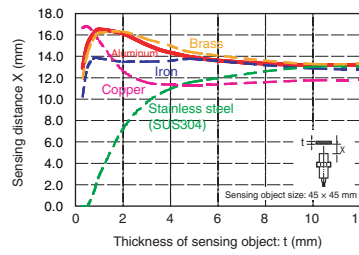


Sensing Area

Sensing area (aluminum) (Thickness: 3.0 mm)

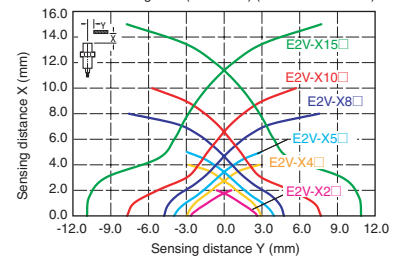


Sensing area (Iron) (Thickness: 3.0 mm)

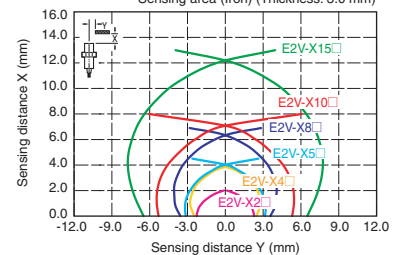

Ordering Information


Standard-distance Sensors, DC 3-wire, Pre-wired Models (Standard Cable Length: 2 m)

Models with 5-m cables are also available and are ordered by adding "5M" to the end of the model number (e.g., E2V-X2B1 5M).


Appearance		Sensing distance	Output	Model	
				Operation mode NO	Operation mode NC
	M12	2mm	PNP	E2V-X2B1 2M	E2V-X2B2 2M
			NPN	E2V-X2C1 2M	E2V-X2C2 2M
	M18	5mm	PNP	E2V-X5B1 2M	E2V-X5B2 2M
			NPN	E2V-X5C1 2M	E2V-X5C2 2M
	M30	10mm	PNP	E2V-X10B1 2M	E2V-X10B2 2M
			NPN	E2V-X10C1 2M	E2V-X10C2 2M

Long-distance Sensors, DC 3-wire, Pre-wired Models (Standard Cable Length: 2 m)


Models with 5-m cables are also available and are ordered by adding "5M" to the end of the model number (e.g., E2V-X4B1 5M).

Appearance		Sensing distance	Output	Model	
				Operation mode NO	Operation mode NC
	M12	4mm	PNP	E2V-X4B1 2M	E2V-X4B2 2M
			NPN	E2V-X4C1 2M	E2V-X4C2 2M
	M18	8mm	PNP	E2V-X8B1 2M	E2V-X8B2 2M
			NPN	E2V-X8C1 2M	E2V-X8C2 2M
	M30	15mm	PNP	E2V-X15B1 2M	E2V-X15B2 2M
			NPN	E2V-X15C1 2M	E2V-X15C2 2M


Long-distance Sensors, DC 3-wire, Connector Models

Appearance		Sensing distance	Output	Model	
				Operation mode NO	Operation mode NC
	M12	4mm	PNP	E2V-X4B1-M1	E2V-X4B2-M1
			NPN	E2V-X4C1-M1	E2V-X4C2-M1
	M18	8mm	PNP	E2V-X8B1-M1	E2V-X8B2-M1
			NPN	E2V-X8C1-M1	E2V-X8C2-M1
	M30	15mm	PNP	E2V-X15B1-M1	E2V-X15B2-M1
			NPN	E2V-X15C1-M1	E2V-X15C2-M1

Long-distance Sensors, DC 3-wire, Smartclick Pre-wired Connector (M12) Models

Appearance		Sensing distance	Output	Model
				Operation mode NO
	M12	4mm	PNP	E2V-X4B1-M1TJ 0.3M
			NPN	E2V-X4C1-M1TJ 0.3M
	M18	8mm	PNP	E2V-X8B1-M1TJ 0.3M
			NPN	E2V-X8C1-M1TJ 0.3M
	M30	15mm	PNP	E2V-X15B1-M1TJ 0.3M
			NPN	E2V-X15C1-M1TJ 0.3M

Standard "Twist-and-Click" Smartclick Connectors

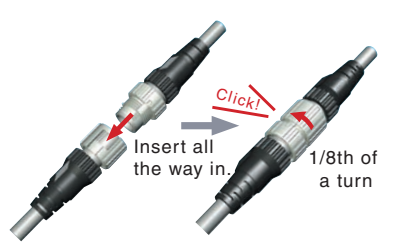Appearance		Type	Cable length (m)	Model	Applicable Proximity Sensor Models
	Standard cable	Straight	2	XS5F-D421-D80-A	E2V-X□□□-M1/M1TJ
			5	XS5F-D421-G80-A	E2V-X□□□-M1/M1TJ
	Vibration-proof robot cable	Straight	2	XS5F-D421-D80-F	E2V-X□□□-M1/M1TJ
			5	XS5F-D421-G80-F	E2V-X□□□-M1/M1TJ
	Oil-resistant polyurethane cable	Straight	2	XS5F-D421-D80-P	E2V-X□□□-M1/M1TJ
			5	XS5F-D421-G80-P	E2V-X□□□-M1/M1TJ

Influence of Surrounding Metal

When embedding the Sensor in metal, be sure that the clearances given in the following table are maintained.

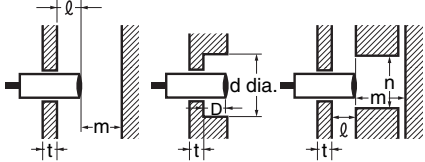


Table 1. Influence of Surrounding Metal (Unit: mm)

Item	Model	E2V-X2	E2V-X5	E2V-X10
l		0	0	0
d dia.		12	18	30
D		0	0	0
m		12	24	45
n		18	27	45

Item	Model	E2V-X4	E2V-X8	E2V-X15
l		0	0	0 (See Note 1.)
d dia.		12	18	30 (See Note 1.)
D		0	0	0 (See Note 1.)
m		12	24	45
n		18	27	45

Note 1: If the thickness of the mounting bracket (t) exceeds 5 mm, be sure to install the Sensor so that $l \geq 2$, d (dia.) ≥ 45 , and $D \geq 2$.

Mutual Interference

When installing Sensors face-to-face or side-by-side, be sure that the minimum distances given in table 2 are maintained.




Chart 2. Mutual Interference (Unit: mm)

Item	Model	E2V-X2	E2V-X5	E2V-X10
A		30	50	100
B		20	30	50

Item	Model	E2V-X4	E2V-X8	E2V-X15
A		35	60	120
B		25	35	70

Other Information


Sensing Distance

- The sensing distance depends on the sensing object size, material, and thickness.
 - If the sensing object has a thickness of less than 1 mm, the sensing distance will decrease.
 - In some cases, it may not be possible to detect stainless steel.
- Use the following graph and the *Influence of Sensing Object Size and Material* information in *Engineering Data (Typical)* as a reference.

Aluminum and Iron Cuttings

Normally aluminum or iron cuttings will not be detected even if they adhere to or accumulate on the sensing surface. Detection signals may be output for the following. If this occurs, remove the cuttings from the sensing surface.

Diameter of cutting = d and diameter of sensing surface = D
Cuttings in center of sensing surface with $d \geq 2/3D$




Model	Size	D
E2V-X2□/X4□		10
E2V-X5□/X8□		16
E2V-X10□/X15□		28

Tightening Torque

Do not tighten the nut with excessive force.

A washer must be used with the nut.




Model	Tightening Torque Dimension(mm)	Part A	Part B
		Torque	Torque
E2V-X2/X4	17	5.9N•m	9.8N•m
E2V-X5/X8	22	15N•m	45N•m
E2V-X10/X15	26	39N•m	78N•m


Dimensions

Pre-wired Models


E2V-X2/X4

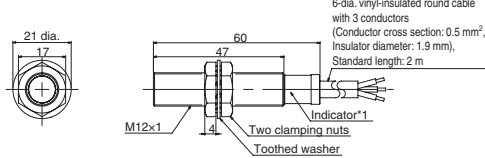

E2V-X5/X8

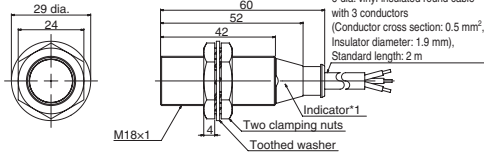


E2V-X10/X15

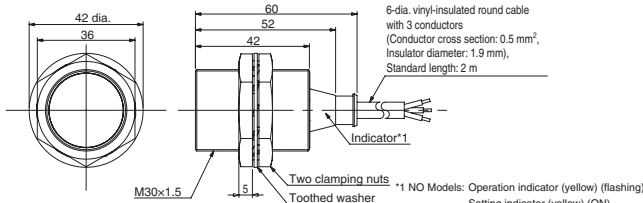


*1 NO Models: Operation indicator (yellow) (flashing)
Setting indicator (yellow) (ON)
NC Models: Operation indicator (yellow) (ON)

Connector Models


E2V-X4□-M1

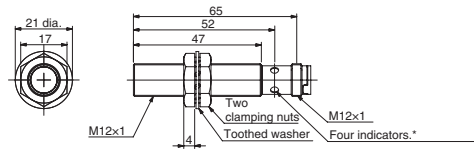

E2V-X8□-M1

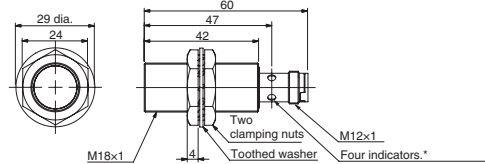


E2V-X15□-M1

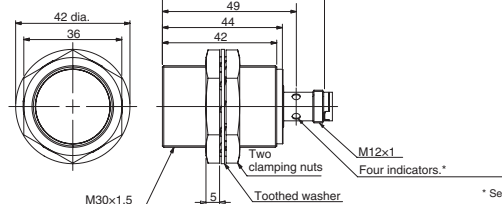

* Setting indicator (ON)
Operation indicator (flashing)

Pre-wired Connector Models

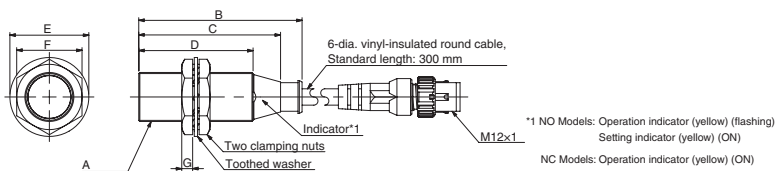

*1 NO Models: Operation indicator (yellow) (flashing)
Setting indicator (yellow) (ON)
NC Models: Operation indicator (yellow) (ON)

Pre-wired Connector Models

Item	Model	E2V-X4□-M1TJ	E2V-X8□-M1TJ	E2V-X15□-M1TJ
A		M12x1	M18x1	M30x1.5
B		60	60	60
C		---	52	52
D		47	42	42
E		21 dia.	29 dia.	42 dia.
F		17	24	36
G		4	4	5

Mounting Hole Dimensions



Proximity Sensor dimensions	M12	M18	M30
Dimension H (mm)	12.5 ^{+0.5} ₀ dia.	18.5 ^{+0.5} ₀ dia.	30.5 ^{+0.5} ₀ dia.

This document provides information mainly for selecting suitable models. Please read the document Instruction Sheet carefully for information that the user must understand and accept before purchase, including information on warranty, limitations of liability, and precautions.

OMRON Corporation

Industrial Automation Company

Sensing Devices Division H.Q.
Industrial Sensors Division
Shioikoji Horikawa, Shimogyo-ku,
Kyoto, 600-8530 Japan
Tel: (81)75-344-7022
Fax: (81)75-344-7107

Regional Headquarters

OMRON EUROPE B.V.
Sensor Business Unit
Carl-Benz-Str. 4, D-71154 Nufringen,
Germany
Tel: (49) 7032-811-0/Fax: (49) 7032-811-199

OMRON ELECTRONICS LLC
One Commerce Drive Schaumburg,
IL 60173-5302 U.S.A.
Tel: (1) 847-843-7900/Fax: (1) 847-843-7787

OMRON ASIA PACIFIC PTE. LTD.
No. 438A Alexandra Road # 05-05/08 (Lobby 2),
Alexandra Technopark, Singapore 119967
Tel: (65) 6835-3011/Fax: (65) 6835-2711

OMRON (CHINA) CO., LTD.
Room 2211, Bank of China Tower,
200 Yin Cheng Zhong Road,
Pu Dong New Area, Shanghai, 200120, China
Tel: (86) 21-5037-2222/Fax: (86) 21-5037-2200

Authorized Distributor:

Note: Specifications subject to change without notice.
CSM_3_1_0315

Cat. No. D107-E1-01
0907