

Sockets, Slim I/O Relays, I/O Relay Terminals

Push-In Plus Terminal Block Series

PYF-PU (Sockets for MY Relays)


P2RF-PU (Sockets for G2R-S Relays)

G2RV-SR/G3RV-SR (Slim I/O Relays)

G70V (I/O Relay Terminals)

P7SA-PU (Sockets for G7SA Relays with Forcibly Guided Contacts)

A New Standard for Reducing Work in Control Panels

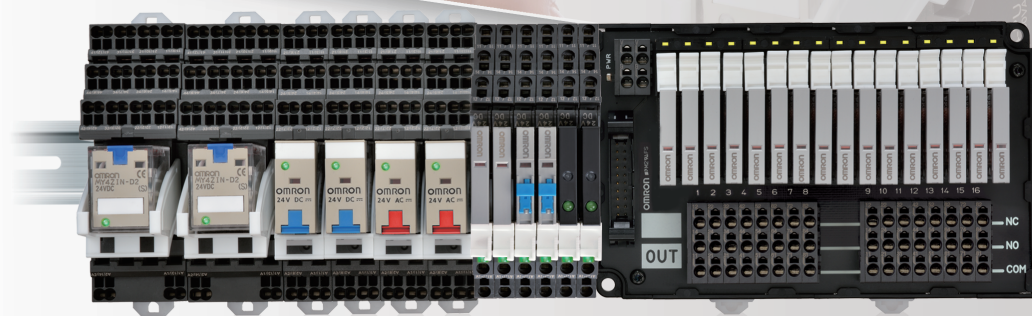

April 2017
New I/O Relay Terminal models available with internal terminal connections.

Sockets for G7SA Relays Series added Oct. 2016

- Push-In Plus terminal blocks for easy wiring
- Installation with either top or bottom facing up for more flexible in-panel wiring*
- A compact design and unique structure help reduce work from designing to maintenance

*Excluding G70V and P7SA-PU

New Value For Control Panels

Control Panels: The Heart of Manufacturing Sites.

Evolution in control panels results in large evolution in production facilities.

And if control panel design, control panel manufacturing processes, and human interaction with them are innovated, control panel manufacturing becomes simpler and takes a leap forward.

OMRON will continue to achieve a control panel evolution and process innovation through many undertakings starting with the shared Value Design for Panel *1 concept for the specifications of products used in control panels.

*1 Value Design for Panel



Our shared Value Design for Panel (herein after referred to as "Value Design") concept for the specifications of products used in control panels will create new value to our customer's control panels.

Combining multiple products that share the Value Design concept will further increase the value provided to control panels.




Innovation for panel building Process

Further Evolution for Panels

New Value For Control Panels

Simple & Easy for panel business People

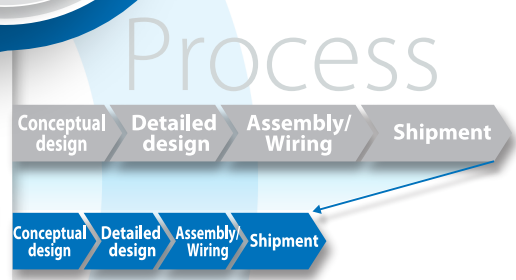


Panels

People



A New Standard for Reducing Work in Control Panels

Combining a Wide Selection of Relays with the Easy-to-use Push-In Plus Terminal Block Series Reduces Wiring and Workload

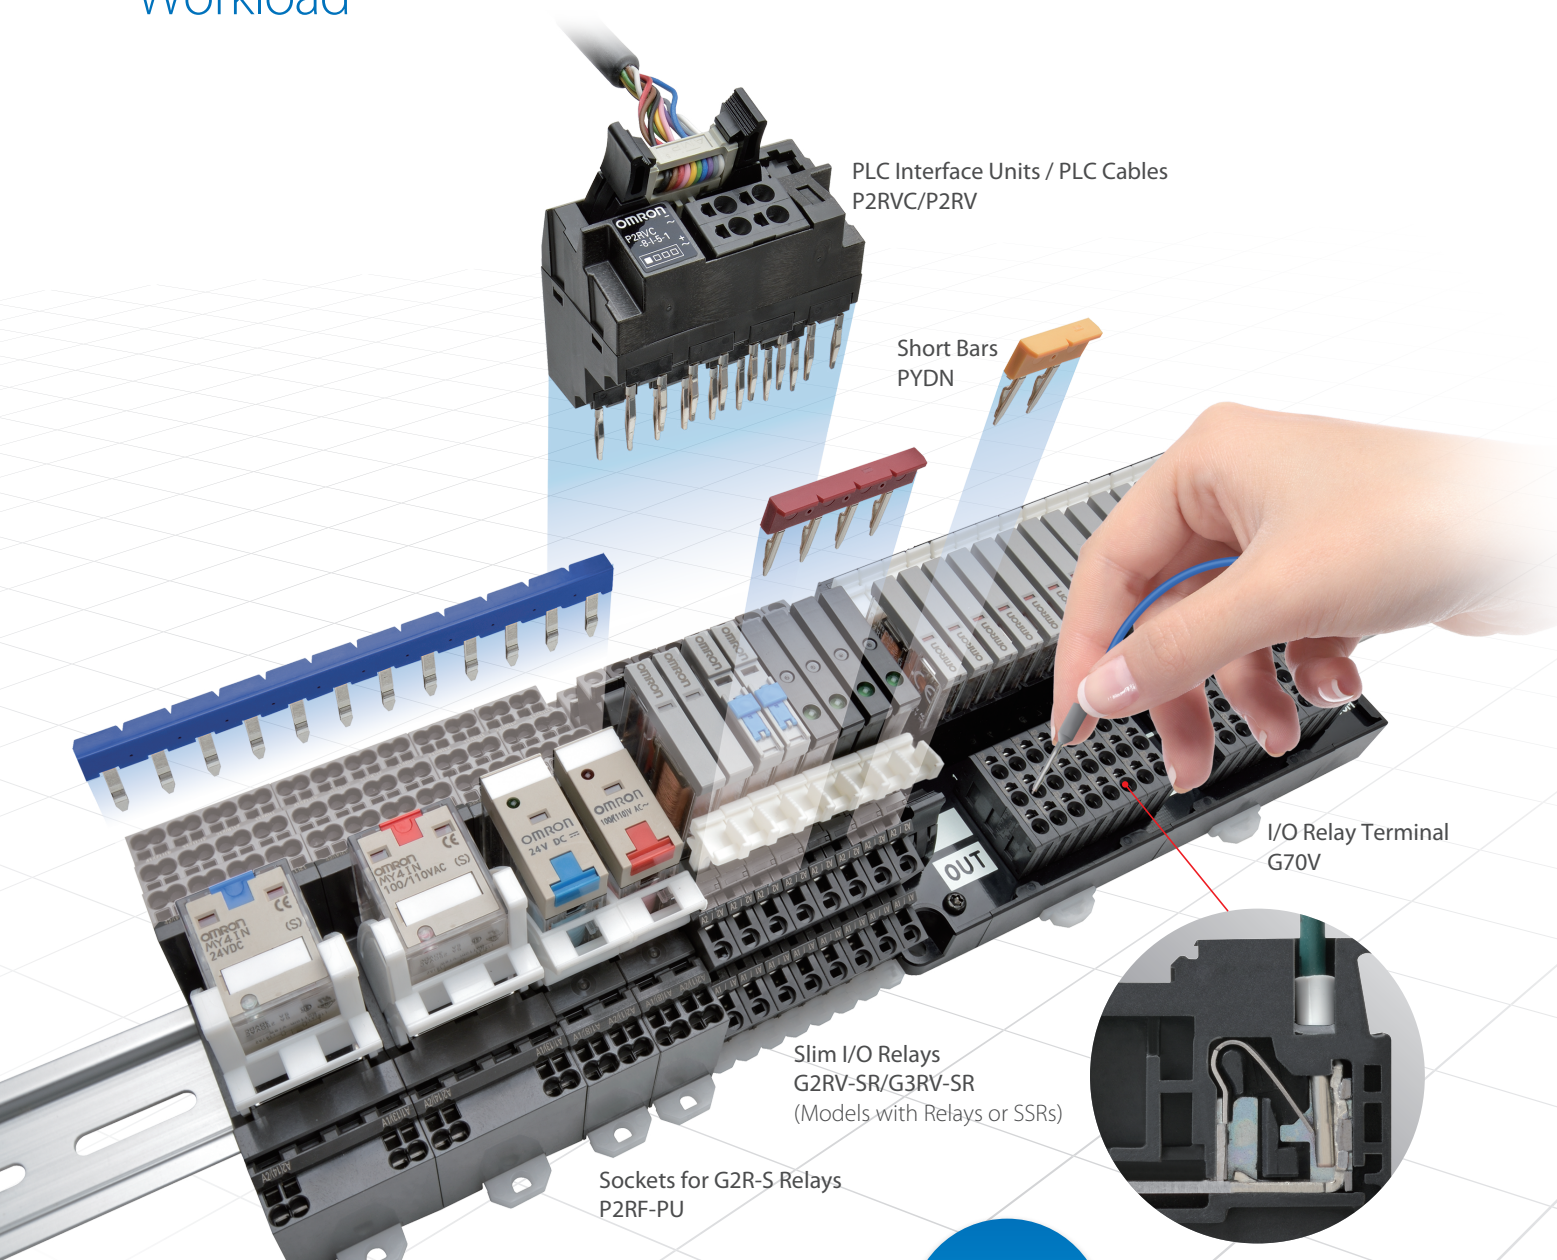

PLC Interface Units / PLC Cables
P2RVC/P2RV

Short Bars
PYDN

I/O Relay Terminal
G70V

Slim I/O Relays
G2RV-SR/G3RV-SR
(Models with Relays or SSRs)

Sockets for G2R-S Relays
P2RF-PU

Sockets for MY Relays
PYF-PU

**Wiring in a
Single Step**

Push-In Plus terminal blocks enable easy insertion of ferrules or solid wires without any tools.


OMRON provides many accessories that make I/O products more convenient.

Push-In Plus Terminal Blocks for Easy Wiring

Just Insert Wires: No Tools Required


Now you can use Push-In Plus terminal blocks to reduce the time and work involved in wiring.

Greatly Reduce Wiring Work with Push-In Plus Terminal Blocks

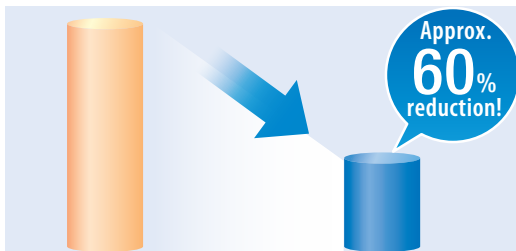

Conventional screw terminal blocks OMRON Push-In Plus terminal block

*Information for Push-In Plus and screw terminal blocks is based on OMRON's actual measurement value data.

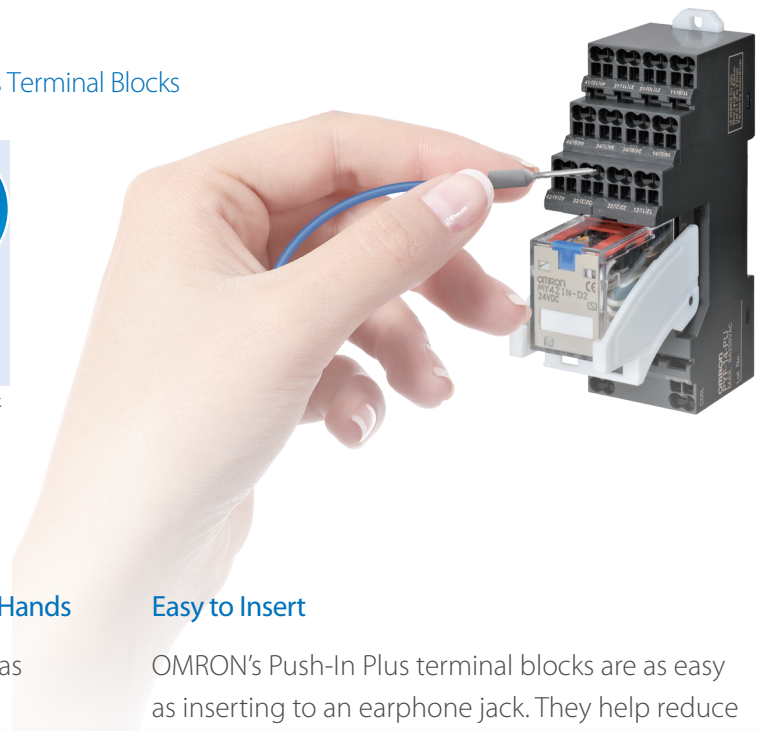

Screwdriver Held in Place to Free Both Your Hands

Optimized shape to hold the screwdriver was created by the resin parts and the spring. Work goes smoothly when connecting stranded wires directly to the terminal because it's easier to aim at the desired terminal.



Easy to Insert

OMRON's Push-In Plus terminal blocks are as easy as inserting to an earphone jack. They help reduce the work load and improve wiring quality.

Held Firmly in Place


Even though less insertion force is required, the wires are held firmly in place. The advanced mechanism design technology and manufacturing technology produced a spring that ensures better workability and reliability. The same strength as screw terminal blocks is provided.

No Retightening Required

Tightening screws is necessary for screw terminal blocks, but with Push-In Plus terminal blocks, there is no need for retightening. This reduces works for wirings, inspections, delivery (shipping), or maintenance.



PYF-PU, P2RF-PU, G2RV-SR/G3RV-SR Installation with Either Top or Bottom Facing Up for More Flexible In-panel Designing

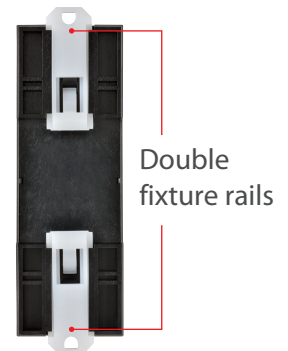

Back of Push-In Plus Terminal Block Socket

There are no installation direction restrictions, which enables flexible, efficient wiring inside panels.

Specified Installation Direction (Previous Industry Standard)

No Installation Direction Restrictions

Output (contacts)

PLC (I/O Units)

Input (coils)

Input (coils)

PLC (I/O Units)

Output (contacts)

Installation is possible with either top or bottom facing up.

The ability to be installed with either top or bottom facing up simplifies designing and reduces wiring. A unified height of 90 mm enables sharing short bars, reduces work in managing stocks, and reduces design work.


And the fixture rails can be pulled out to mount the Relays with screws. (Applicable models: PYF-PU and P2RF-PU)

*You can wire by the shortest path.

Push-In Plus Terminal Block Features

Standard-feature Release Levers

All Push-In Plus Terminal Block Sockets come with release levers as standard for easy Relay locking and releasing.

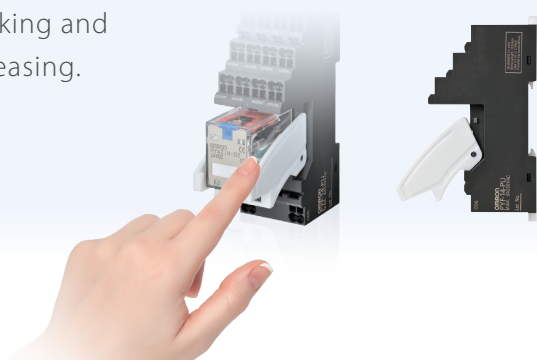

Certified for Main Safety Standards

Globally applicable design for reliable use in most countries around the world.



Note: Refer to individual datasheets for details.

Slim I/O Relays G2RV-SR/G3RV-SR

Compact Design and Unique Structure Help Reduce Work from Designing to Maintenance

G2RV-SR

G2RV Relays, which were optimally designed for in-panel applications, can be mounted to downsize panels by 25% over previous OMRON Relays.

Previous OMRON Relay

Comparison with previous OMRON Relay
25%
Smaller in size

Protective cover
PAT. Stopper for preventing incorrect operation

Latching lever
Reduces circuit checking, operation confirmation, and inspection work.

Mechanical indicator
Linked to contacts to enable operation confirmation.

Plug-in terminals
Provide reliability because the terminals do not bend during replacement work.

Transparent case
Easy confirmation of Relay contact state

Release lever
Easy Relay locking and releasing

80 mm

90 mm

With latching lever Basic model

G3RV-SR

Optimal SSR (Solid State Relay) with high-frequency, high-speed switching in the same slim shape and size as the G2RV-SR

Release lever
Easy Relay locking and releasing

80 mm

90 mm


Plug-in terminals
Provide reliability because the terminals do not bend during replacement work.

Slim I/O Relays, I/O Relay Terminals G2RV-SR/G3RV-SR, G70V

PLC Cables Reduce Wiring Even Further


Using a PLC Interface Unit with G2RV-SR/G3RV-SR Slim I/O Relays

You can connect 8 I/O points directly with just one PLC cable to effectively reduce wiring work.

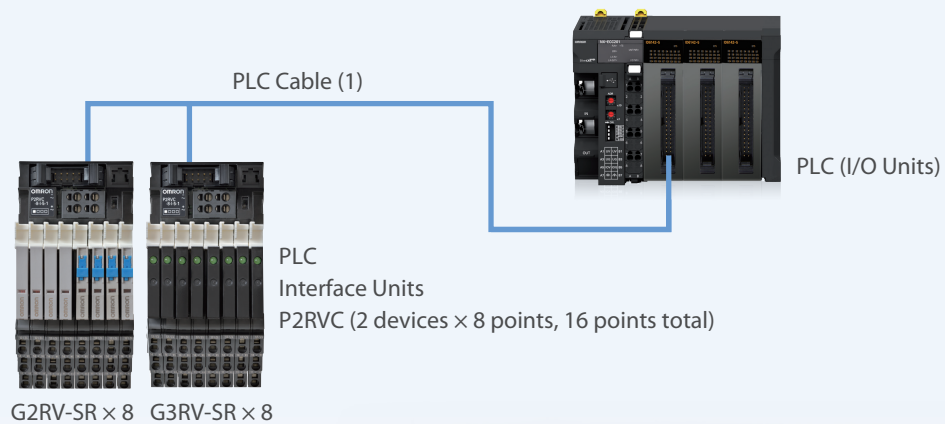

Using a G70V I/O Relay Terminal

You can connect 16 I/O points with just one cable with connectors to reduce wiring work.

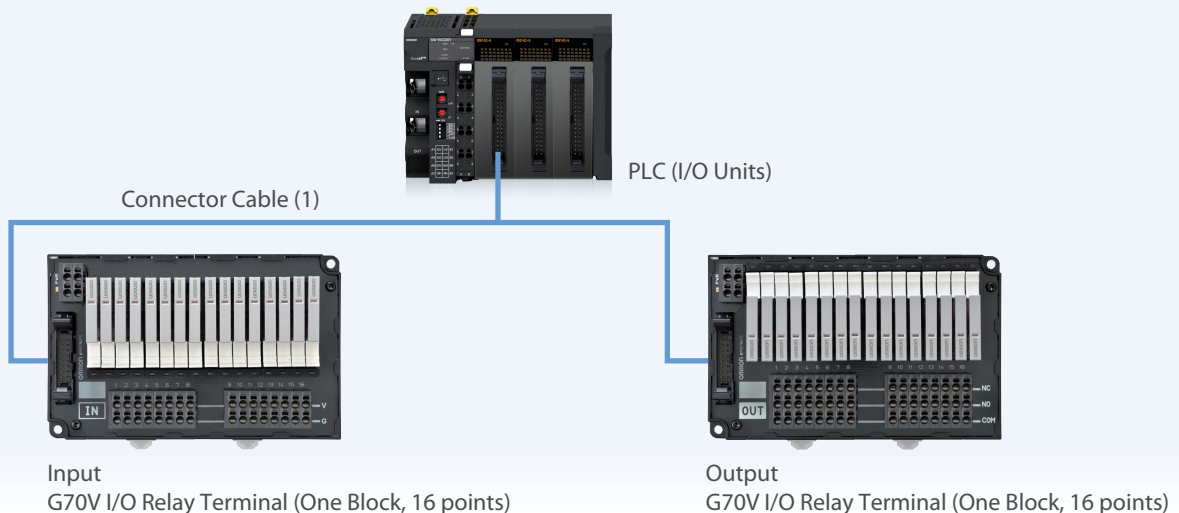

Sockets for Relays with Forcibly Guided Contacts P7SA-PU

Reduced Control Panel Size and Less Wiring Work

Featuring Push-In Plus Terminal Blocks on Sockets for G7SA Relays with Forcibly Guided Contacts


Industry's **slimmest** design*
[P7SA-PU (6-pole)]

Industry's slimmest design


Control panel sizes can be kept to a minimum.

Built-in LED operation indicator and diode

P7SA-PU
6 poles

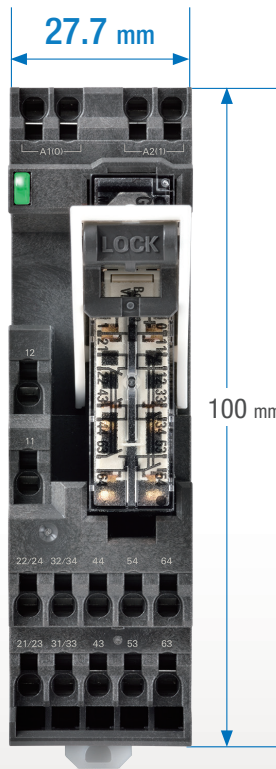

P7SA-PU
4 poles

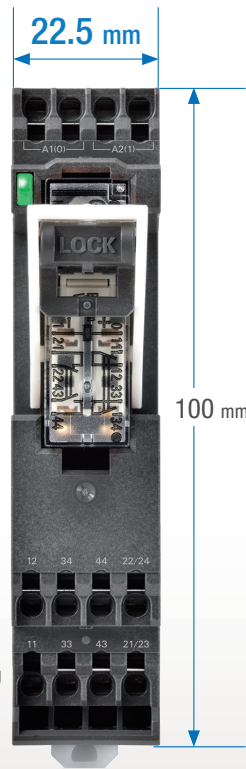

*Six-pole Sockets for Relays with Forcibly Guided Contacts. According to OMRON investigation in July 2016.

Double-wire Terminals on the Coil Side and Short Bars on the Contact Side Reduce Crossover Wiring Time


Coil side


The wiring can be crossed-over if crossover wiring of the coil terminals is necessary.



Contact side

The short bars can be crossed-over on the contact side if necessary.

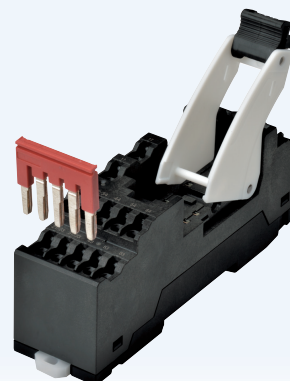




The G7SA is a compact, slim Relay with Forcibly Guided Contacts that meets EN standard requirements (EN 50250 / Class A VDE certification).

By using a forcibly guided contact mechanism, this Relay can detect the occurrence of contact welding via the control circuit. With a lineup that includes slim Sockets with Push-In Plus terminal blocks, control panel sizes can be kept to a minimum, and wiring time can be reduced.


Relays with Forcibly Guided Contacts G7SA
Application Examples



Machining center



Pressing machine

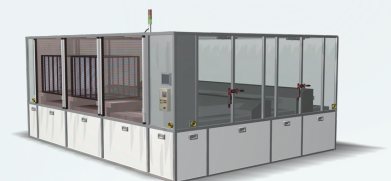


FPD manufacturing equipment



NX Series Safety Controller

G7SA + P7SA-PU

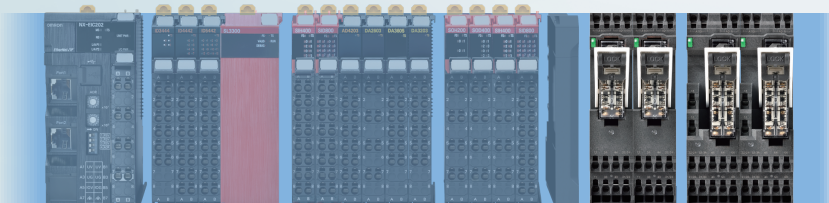


Safety Input


Safety Output

4 poles

6 poles

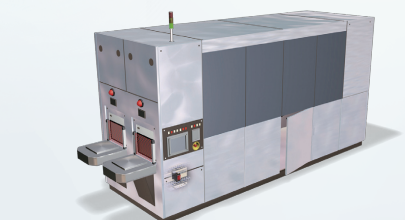

Semiconductor manufacturing equipment








Automobile production line

Product Lineup







Push-In Plus Terminal Block Sockets

PYF-PU-Applicable Models



Applicable models	General-purpose Relays		SSRs	Timers	
	MY2	MY4	G3F / G3FD	H3Y(N)-2-B	H3Y(N)-4-B
No. of poles	2	4	1	2	4
Socket model	PYF-08-PU	PYF-14-PU	PYF-08-PU	PYF-08-PU-L*	PYF-14-PU-L*
Appearance					

*A release lever is not included.

P2RF-PU-Applicable Models





Applicable models	General-purpose Relays		SSRs	Timers		Liquid Leakage Sensor Amplifiers
	G2R-1-S	G2R-2-S	G3R-I/O / G3RZ	H3RN-1-B	H3RN-2-B	K7L-□-B
No. of poles	1	2	1	1	2	-
Socket model	P2RF-05-PU	P2RF-08-PU	P2RF-05-PU	P2RF-05-PU	P2RF-08-PU	P2RF-08-PU
Appearance						

P7SA-PU-Applicable Models (Released in October 2016)

Applicable models	Relays with Forcibly Guided Contacts G7SA	
No. of poles	4	6
Socket model	P7SA-10F-ND-PU	P7SA-14F-ND-PU
Appearance		

Relay Products with Push-In Plus Terminal Blocks





Slim I/O Relays

	Basic model	With latching lever	For microloads (gold-plated contacts)	Solid State Relays (SSRs)
Model	G2RV-SR500*	G2RV-SR501*	G2RV-SR500-AP*	G3RV-SR500*
AC load	6 A at 250 VAC	6 A at 250 VAC	50 mA at 30 VAC	2 A at 100 to 250 VAC
DC load	6 A at 30 VDC	6 A at 30 VDC	50 mA at 36 VDC	3 A at 5 to 24 VDC
Appearance				

*Relays are also available with screw terminals.

I/O Relay Terminals On Sale from April 2017: Four New Models





These new models provide internal connections between I/O terminals to greatly reduce wiring work and maximize space efficiency (input models: 16 point/common, output models: 4 points/common).

		For inputs		For outputs	
Model	No internal connections	G70V-SID16P-1*	G70V-SID16P*	G70V-SOC16P-1*	G70V-SOC16P*
	Internal connections	G70V-SID16P-1-C16*	G70V-SID16P-C16*	G70V-SOC16P-1-C4*	G70V-SOC16P-C4*
Transistor output		PNP	NPN	PNP	NPN
Appearance					

*Models with Sockets (nine models total) are also available.

Replacement Parts and Accessories Available for Different Applications

Accessories Accessories that make I/O products more convenient

	Short Bars		Separator Plate	PLC Interface Units / PLC Cables	Connector Cables for I/O Relay Terminal
Model	PYDN	XW5S-P2.5	XW5Z-EP12	P2RVC / P2RV	XW2Z-R
Application	Reducing wiring and device connections		Insulation	Reducing wiring	Reducing wiring
Applicable models	PYF-PU P2RF-PU G2RV-SR G3RV-SR	P7SA-PU	G2RV-SR G3RV-SR	G2RV-SR G3RV-SR	G70V
Appearance	<p>Product color ● ● ●</p>  <p>The photo shows the PYDN-7.75 model.</p>				

Products That Create New Value in Control Panels



Switch Mode Power Supplies S8VK-S



Uninterruptible Power Supply (UPS) S8BA



Power Monitors KM-N2/KM-N3



Measuring and Monitoring Relays K8DT



Solid-state Timers H3DT



Solid-state Timers H3Y(N)-B



Solid-state Timers H3RN-B



Liquid Leakage Sensor Amplifiers K7L-B



Sockets for Relays with Forcibly Guided Contacts (for G7SA) P7SA-PU



Common Sockets (for MY/H3Y(N)-B) PYF-PU(-L)




Common Sockets (for G2R-S/H3RN-B/K7L-B) P2RF-PU



Slim I/O Relays G2RV-SR



Slim I/O Relays G3RV-SR



I/O Relay Terminals G70V



Pushbutton Switches Push-In Plus Terminal Block Series A22N-P/A30N-P/M22N-P



Solid State Relays for Heaters G3PJ



DIN Track Terminal Block XW5T



Digital Temperature Controllers E5CC-B/E5EC-B

Panel Assist Web

www.ia.omron.com/solution/panel/



Innovation in Control Panel Building Cat. No. Y218

Refer to the PYF-□□-PU/P2RF-□□-PU Push-In Plus Terminal Block Sockets Datasheet (Cat. No. J212), the G2RV-SR/G3RV-SR Slim I/O Relays Datasheet (Cat. No. J214), the G70V I/O Relay Terminal Datasheet (Cat. No. J215), and the G7SA Relays with Forcibly Guided Contacts Datasheet (Cat. No. J120) for details.

Before you place an order, please read and understand "Agreement for Using the Product" available on Omron's latest "Best control devices Omron", "General Brochure" or Omron's website.

OMRON Corporation Industrial Automation Company
Kyoto, JAPAN

Contact: www.ia.omron.com

Regional Headquarters

OMRON EUROPE B.V.
Wegalaan 67-69, 2132 JD Hoofddorp
The Netherlands
Tel: (31) 2356-81-300/Fax: (31) 2356-81-388

OMRON ELECTRONICS LLC
2895 Greenspoint Parkway, Suite 200
Hoffman Estates, IL 60169 U.S.A.
Tel: (1) 847-843-7900/Fax: (1) 847-843-7787

OMRON ASIA PACIFIC PTE. LTD.
No. 438A Alexandra Road # 05-05/08 (Lobby 2),
Alexandra Technopark,
Singapore 119967
Tel: (65) 6835-3011/Fax: (65) 6835-2711

OMRON (CHINA) CO., LTD.
Room 2211, Bank of China Tower,
200 Yin Cheng Zhong Road,
PuDong New Area, Shanghai, 200120, China
Tel: (86) 21-5037-2222/Fax: (86) 21-5037-2200

Authorized Distributor:

© OMRON Corporation 2016-2017 All Rights Reserved.
In the interest of product improvement,
specifications are subject to change without notice.

CSM_1_5_0617
Cat. No. J213-E1-04

0617 (0316)